


Two keyholes and two additional knockouts on the back

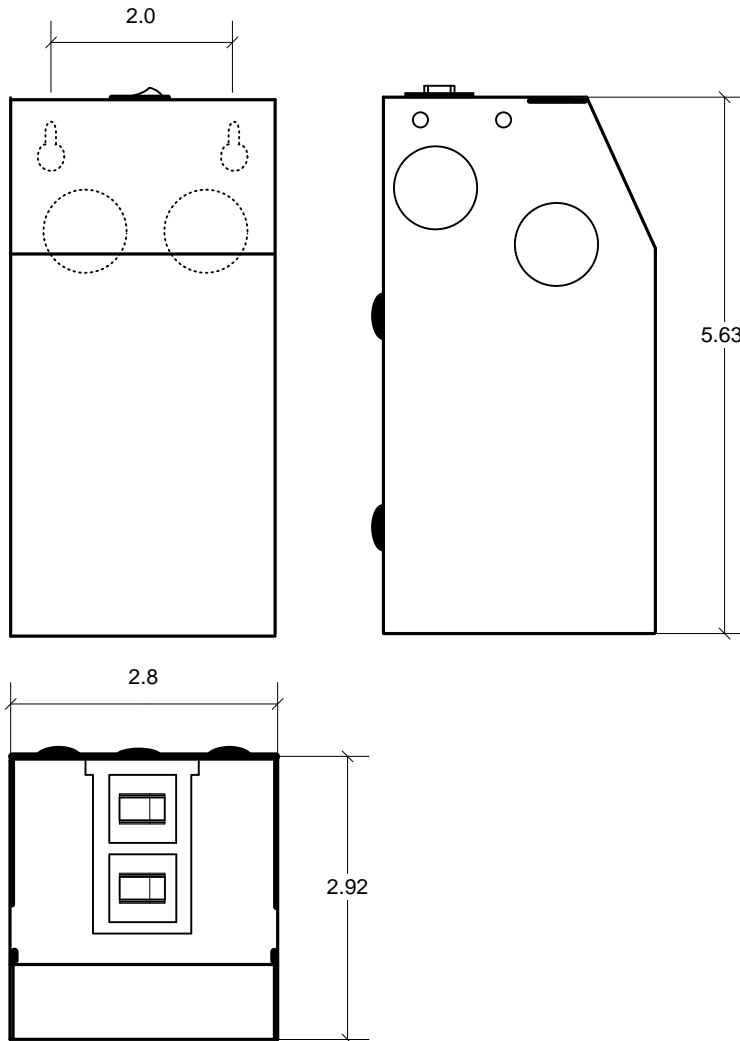

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.3A
3. Enclosure Temperature does not exceed 65°C in a 40°C ambient, fully loaded.
4. The actual transformer 50VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output leads are 18 AWG. 600V. Lead insulation is 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a manual reset thermal 4A circuit breaker on the secondary side.
9. Wiring compartment has 4 side and 2 back knockouts sized for 3/4 inch screw cable connectors.
10. The removable cover for the wiring compartment is secured in place by clips.
11. The enclosure is black powder coated.
12. The transformer is cETLus listed, control # 4005509 confirms to UL STD 1310, certified to CSA STD C22.2 #223.
13. The label contains Technomagnet's catalog number and electrical rating.

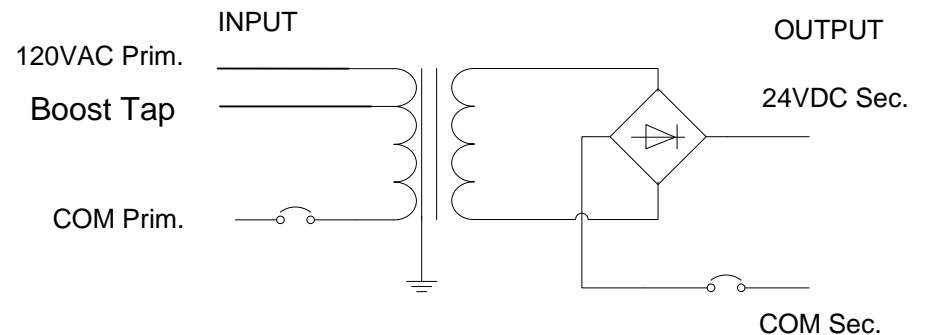



Table 1.

Output Volts	
120AC	Boost
23.8	24.8

 TechnoMagnet LTD. Interactive Lighting Servers		15547 Cabrito Road Van Nuys, CA 91406	
		Page 1 Of 1	Scale: no scale Tolerance: ±
DRW.			
CHK.			
APR.			
Part #TMC – 50S24DC Rev. A		Title: Compact indoor 24VDC 50VA Low voltage Transformer.	