



# L.T.F. Low Voltage Dimmable Power Supply

## TA75WA24LED No-Load Electronic Transformer



Efficiency	higher than 85%
Power Factor	>95%
Case TC	90°C Max.
Protection	Input/Output
Storage	-30°C/+90°C
Class	Class 2 Power Supply
Dimming	ELV Dimmable
Dimming Option	0-10V Dimming



RoHS



WARRANTY  
\* Ask for more information

### FEATURES


- No load technology, works with both Halogen & LED AC loads \*\*
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meets UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable
- Low profile, small compact design to fit in most enclosures

### ELECTRICAL SPECIFICATIONS

Model #	Wattage	Input Voltage	Output Voltage	Load Type	Dimming
TA75WA24LED	75W	120V AC, 0.63A 50/60Hz	24V AC	AC LED Incandescent or Halogen	ELV, Optional 01-10V

### MECHANICAL SPECIFICATIONS

Available Form Factors	Dimensions
"B4" - Standard	2 21/32" x 1 9/32" x 26/32" 67.5mm x 33mm x 21mm

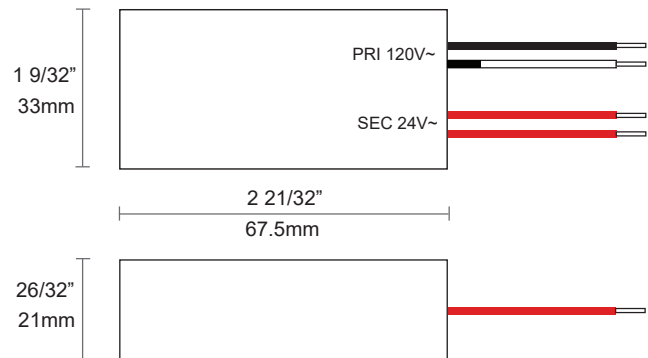

### B4 - Standard