

**96W DS96W24VD010**  
Constant Voltage

**UNIDRIVER**



Efficiency	>88%
Power Factor	>95%
Case TC	85°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP67
Class	Class 2 power supply
Dimming	0-10V
Output Voltage or Constant Current	24V DC / 4000mA




- Universal input voltage; 100-277V AC
- Exceeds Title 24 requirements
- Isolated output power per NEC and UL safety requirements
- UL recognized / Listed, UL8750, UL1310
- Auto-reset ; Short circuit, Overload and Thermal protection

**FEATURES**

- Superior thermal performance
- Aluminum case with high W/m.K encapsulating material
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD





**MODEL KEY**

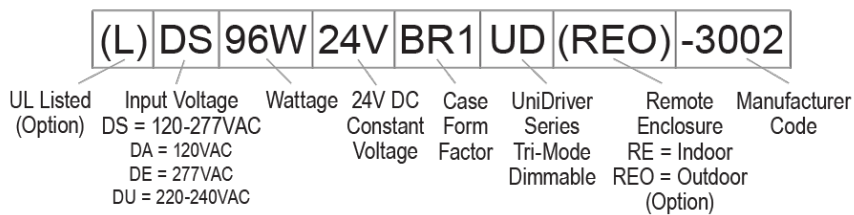

**ELECTRICAL SPECIFICATIONS**

Constant Voltage				
Model Number	Input Voltage	Output Voltage	Output Current	Available Form Factor
DS96W24VD010	100-277V AC 50/60Hz	24V DC	4000mA	BR1

### DIMMING CURVES

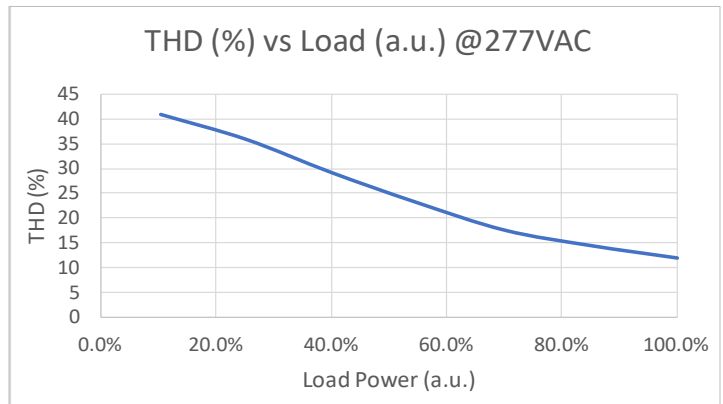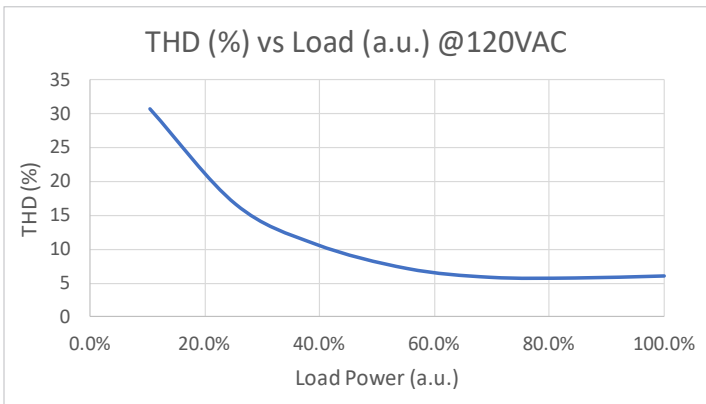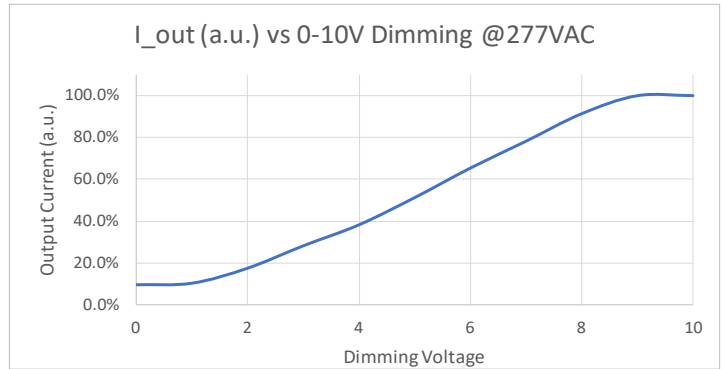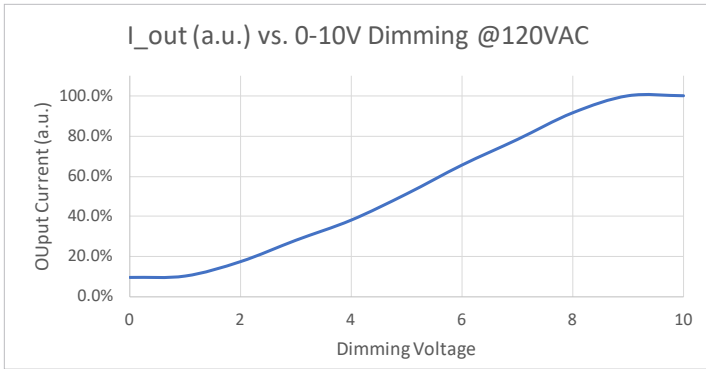

### MECHANICAL SPECIFICATIONS

FORM FACTOR	DIMENSIONS
BR1	172 X 57 X 37mm

