

# DS20W700C1528LI2D010

## Constant Current 0-10V Driver



Efficiency	>85%
Power Factor	>0.95
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP67
Class	Class 2 Power Supply
Dimming	0-10V dimmable
Constant Current	700mA




- Universal Input 100 - 305V AC 50/60Hz
- Class 2 power supply
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/listed, meets UL 8750, 1310 requirements

### FEATURES

- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Efficient, High power factor >0.95

### MODEL KEY

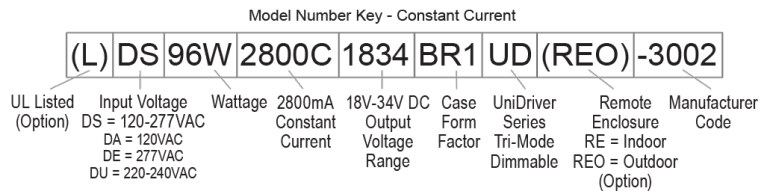

### MODEL SPECIFICATIONS

CONSTANT CURRENT					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DS20W700C1528LI2D010	120V - 277V 50/60Hz	20W	15V - 28V DC	700mA	LI2

**MECHANICAL SPECS**

FORM FACTOR	DIMENSIONS
L12	5.8" (148mm) x 1.6"(40mm) x .9"(22mm)

**L12**

