

DA32W900C2036-3001
Constant Current



Efficiency	>80%
Power Factor	>0.90
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP64
Class	Class 2 Power Supply
Dimming	ELV, TRIAC
Output Voltage or Constant Current	900mA



- Fully dimmable with ELV & TRIAC dimmers
- Flicker free dimming
- Title 24 compliant
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/listed, meets UL 8750, 1310 requirements

FEATURES


- Aluminum casing for optimal heat dissipation
- Auto-reset; short circuit, overload and thermal protection
- Low profile, small form factor, junction box mountable
- Class 2 power supply
- Efficient, High power factor >0.90

MODEL SPECIFICATIONS

CONSTANT CURRENT					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DA32W900C2036-3001	120V AC 0.35A	32W	20 - 36V DC LED	900mA	T41

MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
T41	110 (95) x 55 x 25mm

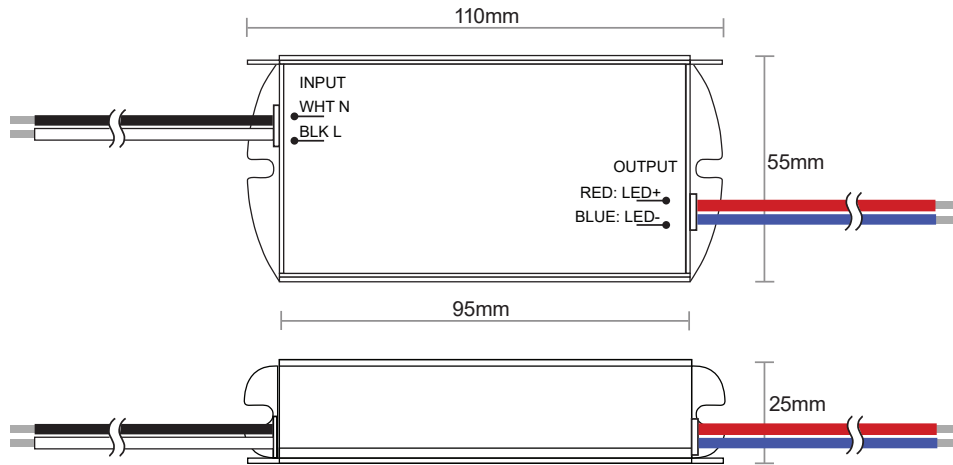

REMOTE ENCLOSURE

Model #	FORM FACTOR	DIMENSIONS
LDA32W900C2036RE-3001	G2	233.1 x 85.5 x 48.9mm

