


TA60WD24LEDS
No-Load Electronic Transformer



Efficiency	>85%
Power Factor	>0.98
Case TC	90°C Max.
Protection	Input/Output
Storage	-30°C/+90°C
Humidity	95% RH Max.
IP Rating	IP65
Class	Class 2 Power Supply
Dimming	Reverse Phase, ELV Dimmers

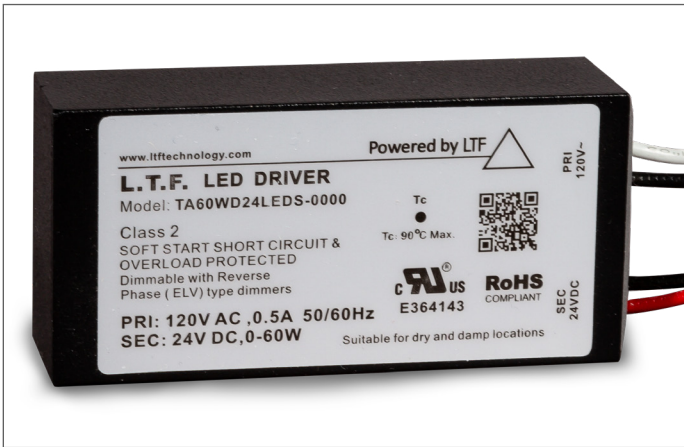

FEATURES

- No minimum load technology, works with both Halogen & LED AC or DC Loads
- Dimmable with reverse phase or ELV type dimmers
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meets UL 2108 requirements
- Low EMI; meets FCC title 15 Class B, conducted emission requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Low profile, small compact design to fit in most enclosures
- Available with optional UL Listed indoor and Outdoor remote enclosures

ELECTRICAL SPECIFICATIONS

Model Number	Input Voltage	Watts	Output Voltage	Load Type	Dimming	Form Factor
TA60WD24LEDS	120V AC 0.5A 60Hz	60W	24V DC	LED Strips, AC LED Bulbs, Incandescent & Halogen	Reverse Phase, ELV	B5

MECHANICAL SPECIFICATIONS

Form Factor	Dimensions
B5	67.5 x 33 x 21mm

